

# 127 SERIES MOULDED CASE CURRENT TRANSFORMERS

# HOBUT

## DESCRIPTION

A range of compact moulded case current transformers suitable for primary currents up to 6000A with built in terminal covers.

## APPLICATION

For transforming various primary currents into 5A or 1A standard secondary using 120mm or 125mm busbars.



## TECHNICAL SPECIFICATION

- Conforms to: IEC185, BS7626, BSEN 60044-1, IEC60044-1 and IEC 61869-2
- Rated System Voltage: 0.72/3kV
- Class 3, 1, 0.5, 0.2 or 0.2S available
- Ambient temperature range -5°C to +50°C
- Continuous current 1.2 x rated current
- Sealable terminal covers
- Protection CT's also available by request

## RANGE


### Type CTH127M

- Busbar window 127 x 38mm
- Primary current 400A - 4000A


### Type CTH127L

- Busbar window 127 x 54mm
- Primary current 400A - 6000A

## DIMENSIONS (mm)

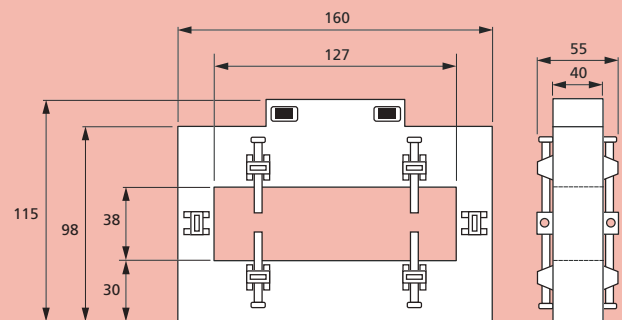

Type CTH127M

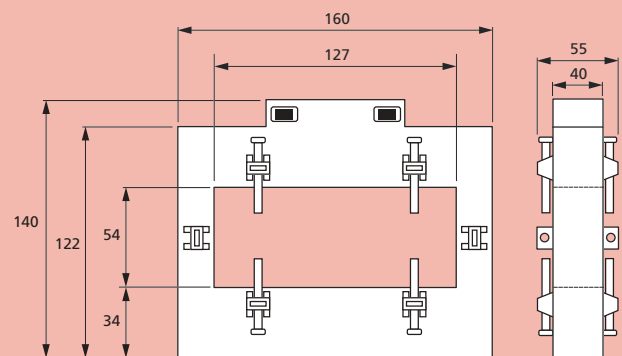

Type CTH127L

Our policy is one of continuous development and therefore specifications may change without notice.

## HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD  
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626  
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk  
<http://www.hobut.co.uk>