

CT75 SERIES 3 PHASE MOULDED CASE CURRENT TRANSFORMERS

HOBUT

DESCRIPTION

Miniature three phase current transformers suitable for primary ranges from 80A-160A with 5A secondary. Supplied with terminal cover and integral foot mount.

APPLICATION

The products have an overall width of 75mm allowing installation directly on top of moulded case circuit breakers. They can also be used independantly in 3 phase applications.




TECHNICAL SPECIFICATION

- Conforms to IEC 185, BS 7626, BSEN 60044-1, IEC 60044-1 and IEC 61869-2.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -5°C to +50°C.
- Frequency range 50-60Hz.
- Insulation level 3kV for 1 minute.
- Continuous current 1.2 x rated current.

RANGE

PRIMARY CURRENT	BURDEN AND ACCURACY	PART No.
60A	1VA Class1	CT75F-60/5-1/1
80A	1.5VA Class1	CT75F-80/5-1.5/1
100A	1.5VA Class1	CT75F-100/5-1.5/1
125A	2.5VA Class1	CT75F-125/5-2.5/1
150A	2.5VA Class1	CT75F-150/5-2.5/1
160A	2.5VA Class1	CT75F-160/5-2.5/1

DIMENSIONS (mm)

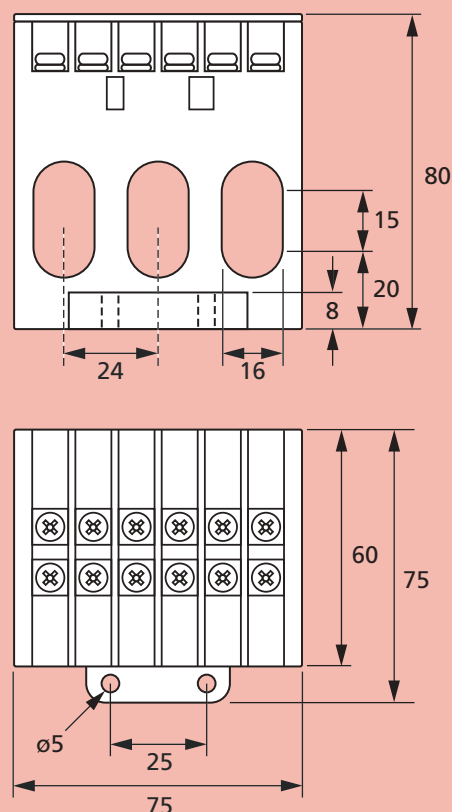

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
<http://www.hobut.co.uk>