

CLIP-TOGETHER CT with plug-in short circuit link

DESCRIPTION

Split-core current transformer with a unique plug-in short circuit link. Supplied in a moulded case with double insulated flying lead and bootlace ferrule terminations.

APPLICATION

For installation into existing networks without the need to disconnect cable circuits. The inbuilt plug-in short circuit link allows the CT to be installed in complete safety. The CT will not operate until the plug-in link is removed.



SPECIFICATIONS

- Conforms to IEC 185, BS 7626, BSEN 60044-1, IEC 60044-1 and IEC 61869-2.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -5°C to +50°C.
- Frequency range 50-60Hz.
- Insulation level 3kV for 1 minute.
- Continuous current, 1.2 x rated current.
- Enclosure flame retardancy UL94V0.




RANGE

Primary Current	VA	CLASS
100A*	1 (2.5)	1 (3)
150A*	1.5 (2.5)	1 (3)
200A**	2.5	1
250A**	2.5	1
300A**	2.5	1
400A**	5	1
500A**	5	1
600A**	5	1
800A**	5	1

* Supplied with 1 metre long flying lead.

** Supplied with 5 metre long flying lead.

DIMENSIONS (mm)

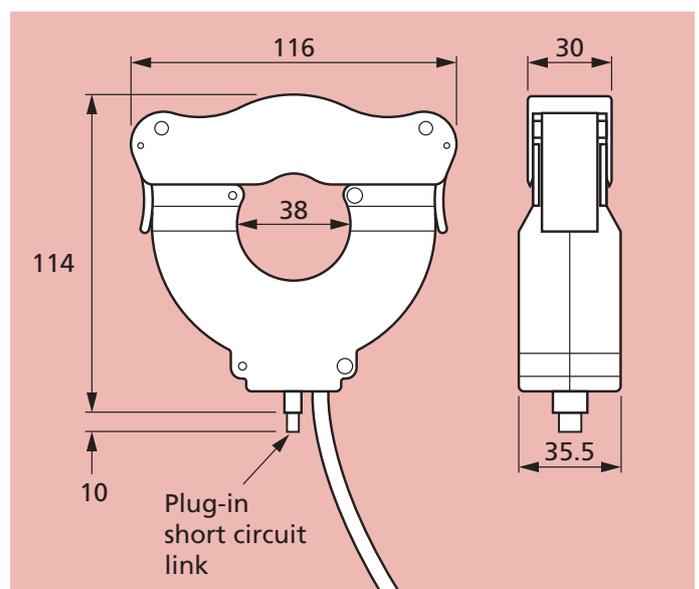

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626

International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk

<http://www.hobut.co.uk>