

RESIN CAST CURRENT TRANSFORMERS

HOBUT

DESCRIPTION

Rectangular current transformers in cast resin finish, available in any busbar size from 60A to 5000A with 1A or 5A secondaries.

APPLICATION

The range is suitable for metering, protective and class X types and is particularly suited to high current and large busbars, where the rectangular style allows for easy mounting of the current transformer.



RECTANGULAR RANGE & ORDERING INFORMATION

Rectangular resin cast CTs are available in any busbar size. Therefore please specify:

1. Busbar size required.
2. Busbar window dimensions required.
3. Outside size required.
4. Class, VA, Protection level etc. For example:

METERING CTs - specify class accuracy & VA
(eg 5VA, class1, 0.5, 0.55, 0.2, 0.25)

PROTECTION CTs - specify protection level & VA
(eg 5P10, 5VA)

CLASS X CTs - specify relay type, fault current, lead resistance, lead length, lead size.

Note: terminal positions are supplied as shown below. If you require a different position please specify. Busbar clamp supplied as standard please specify if not required.

TECHNICAL SPECIFICATION


- Conforms to IEC 185, BS 7626, BSEN 60044-1 and IEC 60044-1.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -30°C to 80°C.
- Frequency range 50-60Hz (optional 400Hz).
- Insulation level 3kV for 1 minute.
- Continuous current, 1.2 x rated current.
- Supplied with M6 screw terminals.

STANDARD RECTANGULAR LAYOUT

Rectangular CTs can be supplied with terminals on short side or long side of CT.

The busbar mounting clamp can also be supplied on short or long side of the CT.

Please specify your preference for terminal and busbar location with your enquiry.

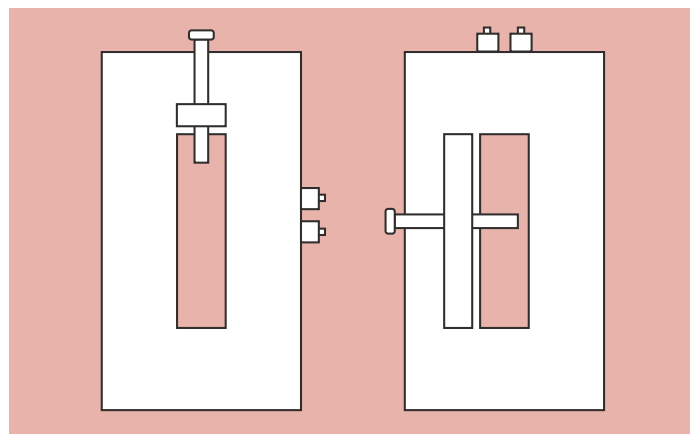

RESIN CAST CURRENT TRANSFORMERS

HOBUT

CUSTOM DESIGNS



As the name suggests custom designs are produced to client's specific requirements taking into account technical issues, space limitations and product application.

Our designers work closely with you to produce a solution and provide a price and delivery schedule.

On agreement the design is passed to our purpose built resin cast department where tooling is made for the CTs case and the core is wound. These two main elements are bought together and baked in our ovens to provide a strong and durable finished product complete with connection terminals and busbar clamps where required.

Many of these custom designs are for three phase application where all three phases can be accommodated in a single cast case.

We welcome any enquiries for this service.

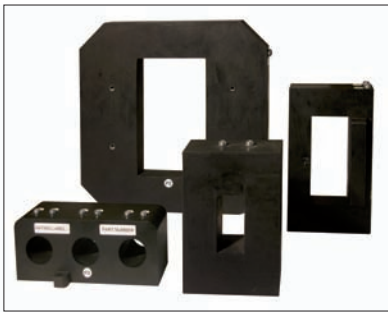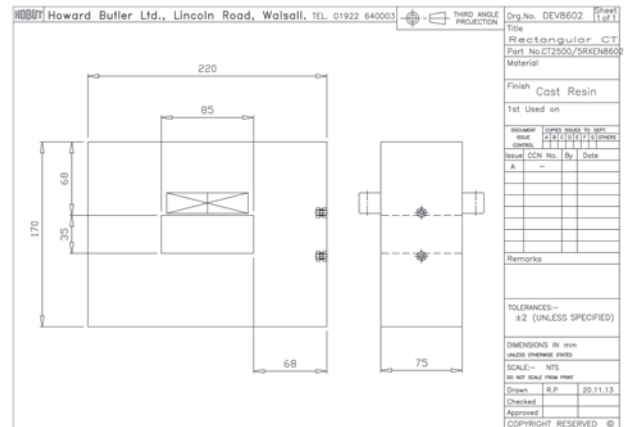

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
Web: www.hobut.co.uk